

# TinyView Monitor

SPI Marine

**Sunlight visible monitor, water protected according to industrial standard IP67**



► [www.spimarine.de](http://www.spimarine.de)

The onboard monitor of our "TinyView"-series was especially designed for outside assembly at the steering wheel. Despite low power consumption the display is extremely bright, spray water protected (according to IP 67) and has a fitting-free hardcover windowpane. The white metal housing resists UV and salt air influences on a long term basis.


"TinyView" is connected to the onboard computer and to the power supply using just one cable. The waterproofed plug-in connection easily enables to handle assembly (and disassembly) at the steering pedestal.

You can use any software that runs on your onboard PC with the integrated trackball. A waterproofed external keyboard or a mouse are not necessary.

The high resolution of the monitor guarantees optimal visibility of any navigational software. A "red-light"-software for night turns is in the scope of supply.

You would like to use two monitors, one monitor inside and another outside at the steering pedestal? And you like to use the navigational software - running on your PC - in the cockpit, while you are sailing?

No problem: "TinyView" is the optimal solution. You can work with two (or more) monitors - even with different display solutions - using a VGA switch (or a USB-VGA converter) connected to your TinyByte board computer.

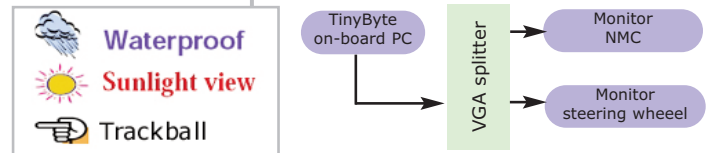

## Technical data

Hardcover protected display, trackball (mouse) integrated.  
 Display optimized for sunlight: >1000 cd/m<sup>2</sup>, transfectiv.  
 Contrast 700:1. Input signal: VGA.  
 Resolution: 800\*600/1024\*768.  
 Connection: VGA, board voltage, USB/serial trackball; just one connecting cable to the PC.  
 Voltage: 12 V DC.  
 Consumption: approx. 12 W, 1 A, standby 20mA.  
 Housing: Aluminium, white coated, antimagnetic, water protected according to IP 67.  
 VESA attachment (75 \* 75 mm). Several solutions.  
 Dimensions: (B\*H\*T in cm) 30,5 \* 23,5 \* 5,7 (without protruding parts und plugs).

Delivery: TFT monitor, "all-in-one" 33 feet combi-cable (12 V, VGA, trackball), red-light software for night turns.

► **Order online at:** <http://www.spimarineshop.de>

**SPI GmbH Marine Division**  
 Kurt-Fischer-Straße 30a  
 22926 Ahrensburg, Germany  
[www.spimarine.de](http://www.spimarine.de)

Tel. +49 (0)4102 - 706 0  
 Fax +49 (0)4102 - 706 444  
[info@spimarine.de](mailto:info@spimarine.de)

tinyview\_eng.qxd 10.2007 - © Copyright 2007 SPI GmbH - All rights reserved.

